


Monitor / Remote Key Functions



PS7006 USER MANUAL

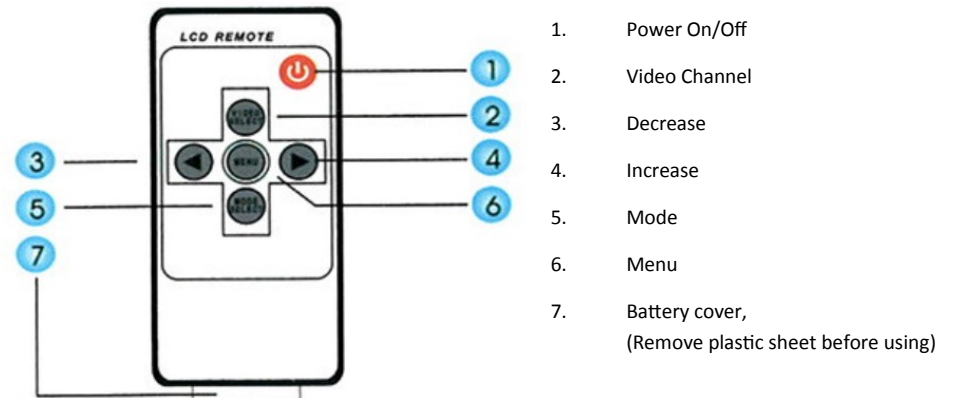

How to use your Monitor

Please Note - Depending on how your equipment has been installed , not all functions will apply.

- If your installation required 1 camera, the monitor generally turns on when you put your vehicle into reverse, and pressing the V1/V2 button will give you a blue screen saying "No Signal". V1/V2 is never used in a 1 camera install.
- If your installation required 2 cameras, generally the monitor is always powered and displays an image, and when placing the vehicle into reverse the picture swaps on the screen. And you can swap between the camera by using the V1/V2 button



Press the power button to turn your monitor on

How to use your Monitor

Press the MENU button to scroll through the menu, using the UP and DOWN arrows to alter each setting



Press the **M** button and the menu will appear on the screen , if you press the **M** button again the next option will appear on the screen (Like above)

Brightness - This option changes the brightness of the picture

Contrast - This option changes the contrast of the picture

Colour - This option changes the colour of the picture

Mode - This option changes the screen size

Tcon - This option changes the rotation of the screen

Language - This option alters the language of the menu

Volume - This option alters the volume if your camera has an audio function, if you camera does not have an audio function we recommend the volume to be off

Reset - This option will reset the monitor back to the original settings

Please note - Menu options and order can change