

PARKSAFE SMART CAMERA USER GUIDE



PARKSAFE AUTOMOTIVE LIMITED
www.parksafeautomotive.com


SPECIFICATIONS

One Button Smart Control
Front and Rear Use
12/24 volts DC Power Input
Full Glass Lens
PAL/NTSC (Switchable)
Parking Lines with style choice and height and width adjustment
Image Orientation (Mirror/Non Mirror and Invert)
IP67 Water/Dust Protection
0.3 Lux
RCA (Phono Connection)

CAUTION

Before drilling holes and fitting check position and view.
Remove protective film off lens before use.
Make sure the power feed is clean and not taken from CAN circuit
Carefully check the +/- wiring sequence during installation.
Ensure safety when working and installing wires near fuel tank.
Do not use a pressure washer the lens directly.

CABLE CONNECTIONS

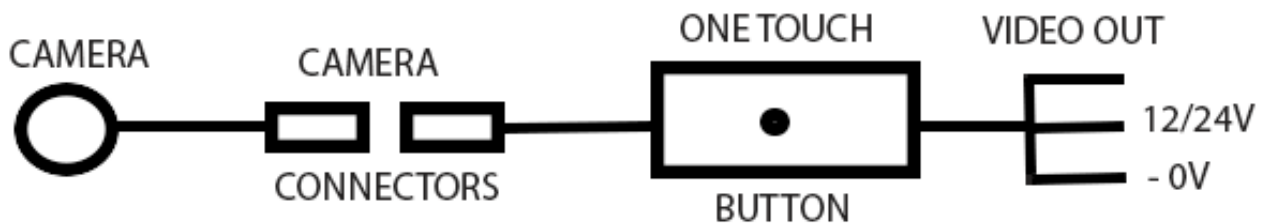

ONE-BUTTON CONTROLLER OPERATION GUIDE:

Ideally place the one button controller in a position where both installer and customer can access. Leave this guide with the customer once completed.

Selectable - Guidelines (Style, Height, Width), PAL/NTSC & Normal/Mirror/Inverted Image
To enter each mode you need to wait 3 seconds after the last mode is selected.

When in mode select click within 3 seconds to change setting. i.e.. 6 Clicks to select Grid Line Height and then leave a very short pause and then press to adjust height. Height will move to maximum and then reset to lowest before moving back up again in a loop.

1 CLICK - Guide Line switching mode: Turn ON/OFF Guide Lines

THE FOLLOWING MODES MUST BE OPERATED WITH GUIDE LINES ON

- 2 CLICKS (Quick-continuous clicks) - Mirror / Non Mirror and Invert Switching Mode
- 3 CLICKS (Quick-continuous clicks) - PAL / NTSC Switching Mode
- 4 CLICKS (Quick-continuous clicks) - Guide Line Type selecting Mode. 2 options of guide lines.
- 5 CLICKS (Quick-continuous clicks) - Guide Line Width adjusting Mode
- 6 CLICKS (Quick-continuous clicks) - Guide Line Height adjusting Mode