


PSC14 Fitting Instructions




The PSC14 camera is a brake light lens with camera and uses the vehicles original lighting module and power feed.

1. Undo the two screws either side, and remove the original brake light lens.

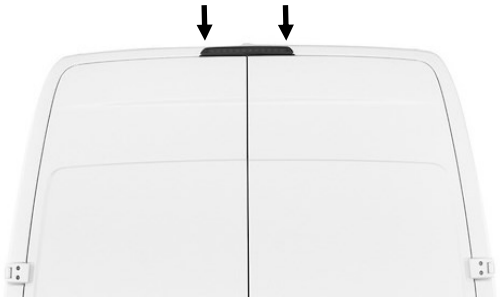

2. Remove the lighting module from the original lens

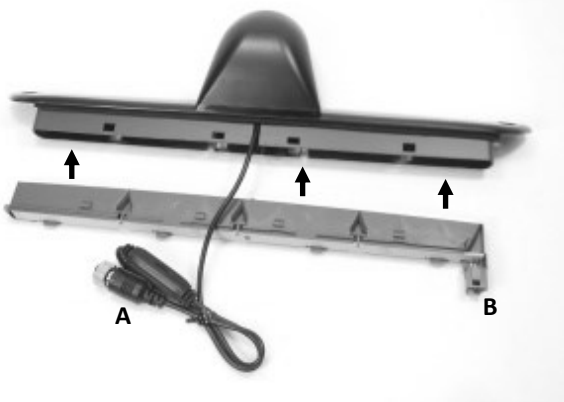

3. Clip the original light module into the camera lens , Feed the 4 pin connector (A) into the vehicle , Plug the original power feed into the socket (B).
4. Place the camera and light module into the vehicles void and fix with the two screws.
5. Connect the 20m cable to the camera 4 pin connector (A) and tighten the locking ring.
6. Run the 20m lead from the rear of the vehicle to the front of the vehicle , where the monitor is located.
7. Once the cable has been run, place the fly lead (C) on the lead and tighten the locking ring.
8. Take the power lead (D) and place into the fly lead (C) and connect the wire to your power source, a typical installtion, the power source is taken from the reverse feed or ignition feed, depending on your installtion.



9. Connect the Yellow plug to the input on your monitor , If you are using the Audio 15 unit, please see step 10.
10. If you have the audio 15 unit programmed for the reverse camera function, please connect the fakra lead to the yellow plug and secure with the heat shrink provided, and insert into the fakra socket on the rear of the unit.

