



Product Code PS2000

Description

500W Pure Sine Wave Power Inverter
Portable power for AC products, AC outlets for connecting multiple loads
High surge capacity for products that require more power to start
High efficiency converts virtually all of the battery's power to AC



Specification


Continuous Output Power (Watt): 500
Output Peak Power (Watt): 1000
Input Voltage (DC): 12V(11~15V)
Output Voltage (AC): 220~240V
eight(KGS): 1.85kg
Output Waveform: Pure sine wave
Efficiency: 85~90%
Low Battery Voltage Alarm Alarm (Volt): 10V ±0.5V/21±1V
Low Battery Voltage shutdown (Volt): 10V ±0.5V/20±1V
Replaceable Fuse: 30A*2
Dimension(L*W*H)200*145*76mm
Over temperature shutdown: < 65°C

Cooling Mode: By Fan
Frequency: 50Hz ±3Hz
Accessory: 1, Power Cable

Overload and over temperature shut down.
Low voltage and over voltage alarm.
Low voltage and over voltage cut off.
Input reverse protection.
Short circuit protection.

MULTI WAY 240v OUTPUT PLUG (UK/EU/USA)

Approvals CE

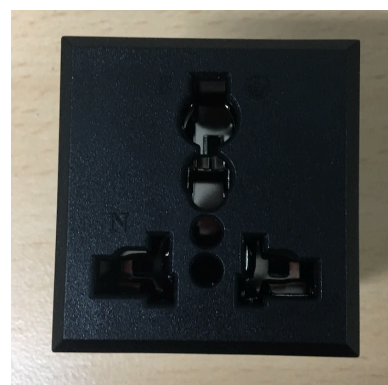

Box Contents

Inverter, Cables, Manual